




臺灣迪肯特股份有限公司


通過ISO9001國際認證

操作說明圖示

INSTRUCTIONS ICON




【入料、攪拌】
【Feed、Stirring】




【過濾、攪拌】
【Filtering、Stirring】



【乾燥、混合】
【Drying、Mixing】



【排料】
【Discharging】



【更新濾網】
【Changing Filter】

附註：除上述規格及尺寸外，可依實際使用情形，設計製造。

Remark: Besides of the above specifications & Dimensions, others can be designed and produced by orders.



構造圖 (STRUCTURE DIAGRAM)



特點：

1. 三機一體，降低設備成本、製程成本。
2. 過濾、混合、乾燥一次完成，可避免製程中不必要的人力搬移及品質污染。
3. 精簡廠房空間，節省人力操作及作業環境的改善。

特性：

1. 採用機械軸封，密封效果佳。
2. 攪拌軸可升降操作，增加製程效果，減少動力損耗。
3. 配合油壓系統，操作簡便、保養容易。
4. 排料完全、無死角。
5. 簡易更換濾布或清洗濾網。

用途：

醫藥品、特用化學品、染料、顏料、污泥、廚餘等。

Advantages:


1. 3 in 1 process, reducing the investment cost and the manufacture cost.
2. Filtration, mixing and drying complete in one process, saving manpower handling and eliminating the contamination to product quality.
3. Less space need, less labour force and improving working environment, safety and hygiene.

Mechanical features :

1. Excellent lead-proof by using mechanical seal.
2. Agitator with lifting mechanism enhancing productivity and saving energy.
3. Hydraulic system, easy handling and maintenance.
4. No dead conner, complete discharge.
5. Easily change of filter or cleaning filter.

Applications:

Pharmaceutical manufacture, fine chemical, dye stuff, pigments, sludge, kitchen residues, etc.

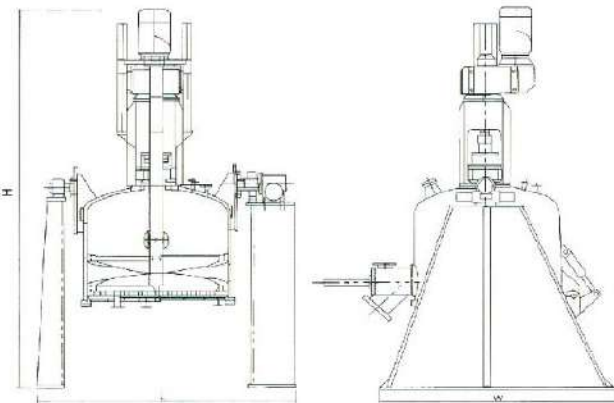

此架臺高度排料時排料口離地面高度約310m/m

型式 MODEL	容量 VOLUME	處理量 CAPACITY	過濾面積 FILTER AREA	動力 POWER	油壓總承 OIL UNIT	外型尺寸 DIMENSIONS(m/m)
FD-600	600 liter	250 liter	0.87 m ²	10HP-4P	2HP-4P	2250L x 1940W x 3740H
FD-1200	1200 liter	450 liter	1.33 m ²	15HP-4P	3HP-4P	2540L x 2300W x 4105H
FD-1600	1600 liter	600 liter	1.77 m ²	20HP-4P	3HP-4P	2750L x 2510W x 4430H